


Closed Mouth Tong

STRAIGHT TORQUE FROM UNIVERSE



- Built-in spring hanger
- Standard jaw and drag ring system



Universe

Machine

C O R P O R A T I O N

Ph
Toll Free

780-468-5211
1-866-468-5211


Address

5545 - 91 Street, Edmonton, Alberta
Canada, T6E 6K4

E-mail
Web Site

sales@umcorp.com
www.umcorp.com

Closed Mouth Tong

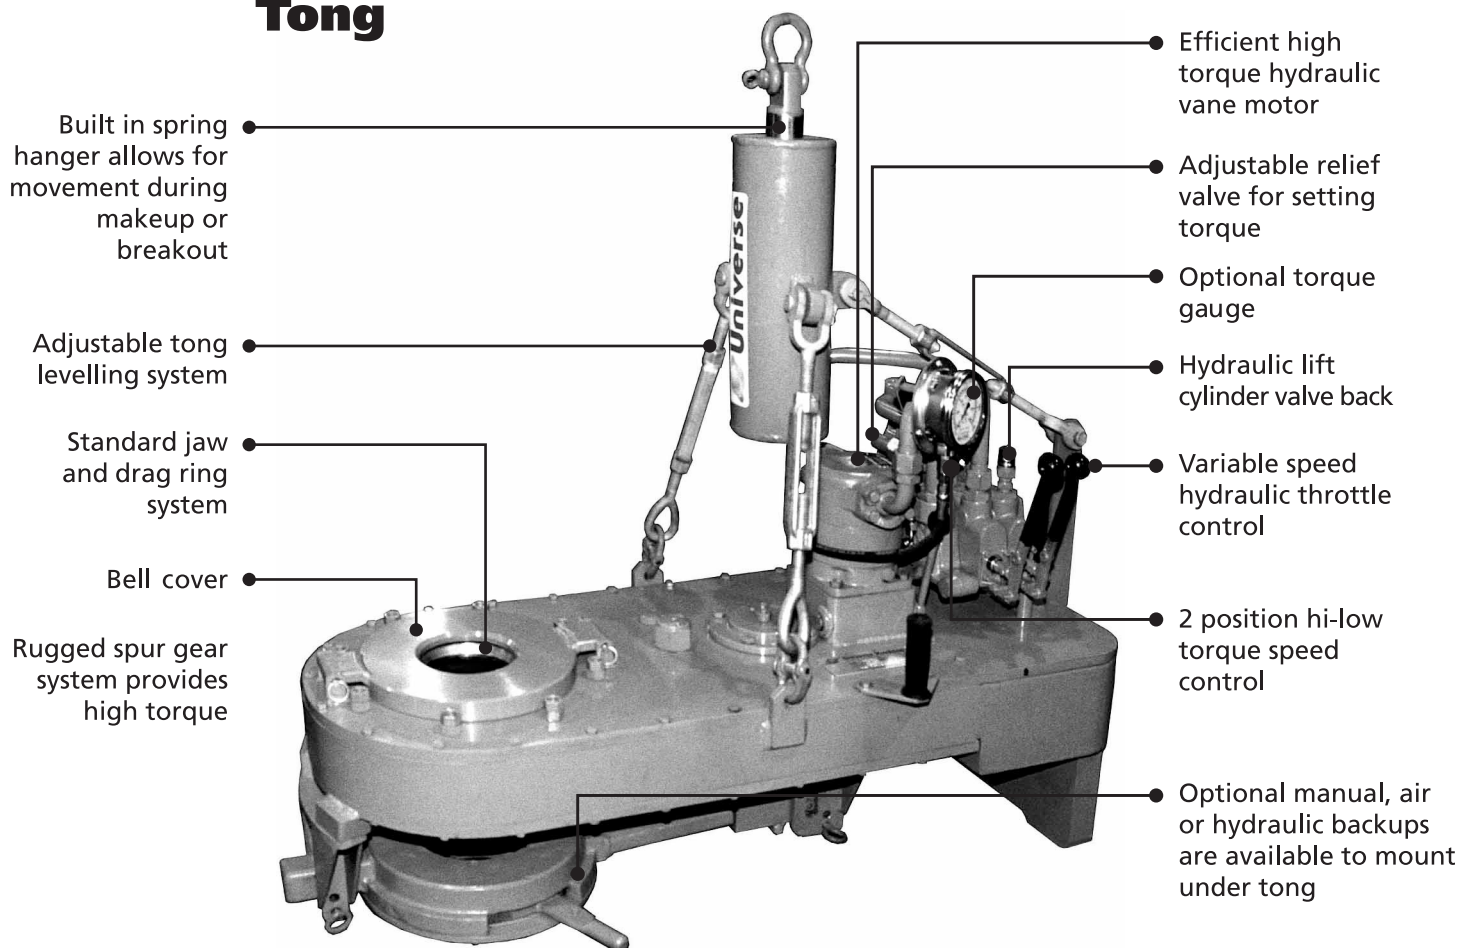


High strength alloy steels used throughout the tong provides a light weight, high torque and compact tong ensuring long life and durability.

Optional electric, diesel skid or trailer mounted hydraulic power units are available to suit customer.

US Patent 5,144,568 Canadian Patent 2 016,319

Size	Torque* Ft-lbs (kg-m)	Weight lbs (kg)	Body Size (W x L) Inches (m)	Torque Arm Inches (m)	Speed Rpm (Max)*	Max. Elevator Dia. Inches (m)	Space Req. on Pipe inches (m) w/o B.U. w BK	
7.00 (178)	13,000 (1,797) @ 3,000 psi (20,684 KPa) - Max 11,100 (1,535) @ 2,500 psi (17,245 KPa) - Max	1,100 (498)	18 x 52 (0.46 x 1.32)	40 (1.02)	135	32 (0.81)	8-1/8 (0.21)	15-3/8 (0.39)
11.75 (298)	18,500 (2,558) @ 3,000 psi (20,684 KPa) - Max 15,400 (2,129) @ 2,500 psi (17,245 KPa) - Max	2,390 (1084)	24 x 62 (0.61 x 1.57)	47 (1.19)	100	40 (1.02)	9-3/4 (0.25)	20-1/2 (0.52)

* Actual torque rating may vary on smaller jaw sizes
Data is subject to change without notice; visit our website for up to date information.



**Universe
MACHINE**
C O R P O R A T I O N

Ph 780-468-5211
Toll Free 1-866-468-5211
Address 5545 – 91 Street, Edmonton, Alberta
Canada, T6E 6K4
E-mail sales@umcorp.com
Web Site www.umcorp.com